

Protezione passiva
Passive protection



Collari intumescenti per uso con tubi in UPVC, ABS, MDPE, HDPE e PP. Fino a 180 REI - RE. Applicazioni esterne, semi incassato o incassato.

Intumescent collar for use with pipe in UPVC, ABS MDPE, HDPE and PP. Till 180 REI - RE External applications, semi-fitted and fitted.

Art. Art.	Misure Measures	€ cad
LC301	32 mm	42,50
LC302	40 mm	47,50
LC303	55 mm	49,00
LC304	63 mm	51,00
LC305	75 mm	60,00
LC306	82 mm	52,50
LC307	90 mm	54,50
LC308	110 mm	58,00
LC309	125 mm	73,00
LC310	160 mm	94,00
LC311	200 mm	356,00
LC312	225 mm	559,00
LC313	250 mm	764,00



Collari intumescenti per uso con tubi in UPVC, ABS, MDPE, HDPE e PP. Fino a 120 REI - RE. Applicazioni esterne, semi incassato o incassato.

Intumescent collar for use with pipe in UPVC, ABS MDPE, HDPE and PP. Till 120 REI - RE External applications, semi-fitted and fitted.

Art. Art.	Misure Measures	€ cad
LC315	55 mm	37,50
LC316	110 mm	56,00
LC317	125 mm	68,00
LC318	300 mm	1.442,00
LC319	315 mm	1.693,00



Sigilante acrilico intumescente facile da usare. Lunga durata Isolamento acustico per uso interno ed esterno Fino a 180 REI - RE.

Intumescent acrylic sealant. Long duration of the insulation for internal/external use. Till 180 REI - RE.

Art. Art.	Versione Version	€ cad
LC320	310 ml bianco/white	11,00
LC321	310 ml grigio/grey	11,00
LC322	310 ml marrone/brown	11,00



Sacchetti tagliafuoco. Facile da installare e rimuovere - Riutilizzabile. Protegge condotti e canaline per passaggi in pareti e pavimenti. Fino a 120 REI - RE.

Fire cutter-bags. Easy to install, and to remove. Reusable. It protects pipes and small ditches for passages in walls and floors. Till 120 REI - RE.

Art. Art.	Misure Measures	€ cad
LC323	300x50x40	26,00
LC324	300x100x40	27,00
LC325	300x150x40	38,00
LC326	300x200x40	39,00

Fasce Intumescenti

Intumescent bands

Art. Art.	Misure Measures	€ cad
LC328	32 mm	15,30
LC329	40 mm	17,00
LC330	55 mm	18,70
LC331	63 mm	20,40
LC332	75 mm	23,70
LC333	82 mm	25,40
LC334	90 mm	27,30
LC335	110 mm	32,30
LC336	125 mm	55,90
LC337	160 mm	66,50
LC338	200 mm	128,20

Fasce flessibili con materiale intumescente di alta prestazione incapsulato in una busta di polietilene per fasciare tubazioni plastiche per attraversamenti di pareti e pavimentazioni. Resistenza fino a 180 REI

Flexible bands with high performance intumescent material encapsulated in a polyethylene bag to wrap plastic pipes for crossing walls and floors. Resistance up to 180 REI.



Fasce Intumescenti universale

Universal Intumescent bands

Art. Art.	Misure Measures	€ cad
LC339	25 metri	770,00

Numeri giri Number of laps	Misure Measures	Lunghezza Length
1	40 mm	126 mm
2	50 mm	352 mm
2	63 mm	402 mm
2	75 mm	478 mm
2	82 mm	521 mm
3	90 mm	867 mm
3	110 mm	1055 mm
4	125 mm	1608 mm
4	160 mm	2047 mm
5	200 mm	3203 mm

Fascia intumescente certificata CE. Installare come da tabella rispettando la lunghezza ed i giri da compiere in funzione del diametro esterno della tubazione.

Intumescent band CE certified. Install as shown in the table, respecting the length and the laps to be performed according to the external diameter of the pipe.



Schiuma sigillante pu

Pu sealing foam


Art. Art.	Misure Measures	€ cad
LC327	750 ml	43,00

Schiuma sigillante resistente fino a REI 240. Prodotto resistente al fuoco utilizzato per riempire fessure irregolari

Sealing foam resistant up to REI 240. Fire resistant product used to fill irregular cracks.



Valvole di intercettazione
Interception valves

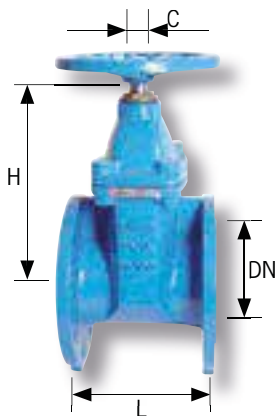

Saracinesca a cuneo gommato, corpo piatto PN16, coperchio, cappello e cuneo in ghisa sferoidale, albero in acciaio inox, volantino in ghisa, verniciatura epossidica. Pressione di esercizio 16BAR

Rubber wedge gate valve in ductile iron. Available in flat and oval body versions. Flanges are drilled to PN 16; pressure operating up to PN 16; temperature up to 90 degrees.

Art. Art.	Fori Hole	DN	L	H	C	€ cad
MC041	4	50	150	205	14,2	149,00
MC042	4	65	170	265	17,2	184,00
MC043	8	80	180	295	17,2	229,00
MC044	8	100	190	330	19,2	279,00
MC045	8	125	200	380	19,2	462,00
MC046	8	150	210	425	19,2	498,00
MC047	12	200	230	550	24	744,00
MC048	12	250	250	660	28	1.284,00
MC049	12	300	270	750	28	1.502,00



Volantino per saracinesca in ghisa. Verniciato a polveri epossidiche.

Gate valve handwheel. Handwheels for moulded steel or iron gate valves.

Art. Art.	Saracinesche Gate valve	DN	Quadro Square	€ cad
MC207	DN 40-50	175	14.2	13,50
MC208	DN 65-80	200	17.2	17,00
MC209	DN 100	220	19.2	30,50
MC210	DN 125-150	220	24	30,50
MC211	DN 200	300	24	36,00
MC212	DN 250-300	360	28	55,50



Chiusini per saracinesca in ghisa con coperchio non carrabile.

Cover for gates valves in cast iron with lid.

Art. Art.	H	Coperchio Lid	Base sup. Upper base	Base inf. Lower base	€ cad
MC224	270	157	190	270	64,00



Valvola a farfalla wafer CE con riduttore di sforzo, indicatore di apertura e switch. In ghisa sferoidale e lente in inox

Wafer butterfly valve CE with reducer and switch. Valve to be used between flanges. Ductile cast iron casting, inox lenses.

Art. Art.	DN	Pollici Inch	€ cad
MC274	50	2"	413,00
MC275	65	2" 1/2	418,00
MC276	80	3"	439,00
MC277	100	4"	530,00
MC278	125	5"	563,00
MC279	150	6"	596,00
MC280	200	8"	992,00



Valvola a farfalla scanalata CE con riduttore di sforzo, indicatore di apertura e switch. In ghisa sferoidale e lente in inox.

Grooved butterfly valve CE with reducer and switch. Valve with reduction. Ductile cast iron casting, rubber lenses.

Art. Art.	DN	Pollici Inch	€ cad
MC281	50	2"	474,00
MC282	65	2" 1/2	515,00
MC283	80	3"	553,00
MC284	100	4"	626,00
MC285	125	5"	723,00
MC286	150	6"	851,00
MC287	200	8"	1.144,00

Valvole di intercettazione

Interception valves

Art. Art.	DN	€ cad
MC226	50	149,00
MC227	65	180,00
MC228	80	220,00
MC229	100	291,00
MC230	125	379,00
MC231	150	494,00
MC232	200	712,00

Art. Art.	DN	€ cad
MC233	40	84,00
MC234	50	95,00
MC235	65	115,00
MC236	80	131,00
MC237	100	207,00
MC238	125	279,00
MC239	150	339,00
MC240	200	529,00

Art. Art.	DN	€ cad
MC150	50	27,10
MC151	65	31,30
MC152	80	35,30
MC153	100	38,70
MC154	125	52,90
MC155	150	69,10
MC156	200	100,40
MC157	250	173,30
MC158	300	209,80

Art. Art.	DN	€ cad
MC259	50	34,90
MC260	65	43,50
MC261	80	51,60
MC262	100	59,80

Art. Art.	DN	€ cad
MC263	40	0,80
MC264	50	2,00
MC265	65	2,10
MC266	80	2,80
MC267	100	3,60
MC268	125	4,40
MC269	150	5,50
MC270	200	6,30
MC271	250	9,00
MC272	300	10,80

Art. Art.	DN	€ cad
MC273	40 – 125	2,00
MC288	150 – 200	4,30
MC289	250 - 300	6,50

Valvola di ritegno a clapet in ghisa con piattello di tenuta gommato. Utilizzabile per acque e vapore. PN 16.

Swing check valve for water and vapor. Cast iron casting and cover, rubber plate.



Valvola a farfalla wafer PN 16 in ghisa sferoidale e lente in inox.

Butterfly valve wafer. Valve to be used between flanges. Cast iron casting, inox lenses.



Flange piane a saldare PN 16.

Plane flange PN 16.



Flange filettate PN 16.

Threaded flange PN 16.



Guarnizioni in gomma tela per flange.

Rubber gasket for flanges.



Dadi e bulloni in acciaio per flange.

Bolts and nuts in zinc-plated steel.

